



SIMATIC ET 200SP,
COMMUNICATION MODULE CM AS-I MASTER ST
ACCOR. AS-INTERFACE SPEC. V3.0

General technical data:

product designation		AS-Interface Master
Product-type designation		CM AS-i Master ST
Protection class IP		IP20
Design of the electrical connection / of the AS-Interface		ET 200SP BaseUnit (Type C0), 20 mm
Type of voltage supply		Via AS-i and backplane bus
Operating condition / separate power supply 24 V		No
Current consumed		
from shaped cables of AS-Interface		
with external 24 V-supply voltage / maximum	mA	70
at 24 V / with AS-i Power24V / maximum	mA	70
from backplane bus / maximum	mA	20
Resistive loss	W	1.7
Insulation voltage / rated value	V	500
Product function / adapted for AS-i Power24V		Yes
Product feature / redundancy capability		No
Product function / web-based management		No
Product function / diagnosis via E-mail		No
Product function / galvanic isolation		Yes

• as status display by LED		DIAG, AS-i OK, AS-i FAULT, PF, CER, CM, AUP, PWR, SL_Xy (A), SL_xY (B)
Type of projection / of the AS-interface		Set pushbutton on device, STEP7, GSD, command interface

Communication:		
Version / of the AS-interface specification		V 3.0
AS-interface masterprofile / is supported		M4 (in acc. with AS-interface specification V 3.0)
Type of data transmission		ET 200SP backplane bus
Number of interfaces		
• as AS-interface		1
• according to RS 485		0
• according to Industrial Ethernet		0
• according to PROFINET		0
• according to wireless		0
• according to USB		0
• others		1
Product component / optical interface		No
Protocol / is supported		
• ASIsafe(Safety at work) protocol		No
• PROFIsafe protocol		No
• PROFIBUS protocol		No
• PROFINET IO protocol		No
• PROFINET CBA protocol		No
• TCP/IP		No
• SNMP		No
Standard for wireless communication / IEEE 802.11		No

Ein- und Ausgänge:		
Number of inputs / for AS Interface / maximum		496
Number of outputs / for AS Interface / maximum		496
Number of AS-i slaves / per AS-Interface / maximum		62
Bus cycle time / of the AS-interface		
• at 31 slaves	ms	5
• at 62 slaves	ms	10
Access to digital I/O data		via process diagram/peripheral addresses and data record transfer
Access to analog I/O data		via data record transfer

Mechanical design:		
Width	mm	20
Height	mm	69.2

Depth	mm	53.6
Type of mounting		Pluggable in BaseUnit
Module format		IP20

Ambient conditions:

Ambient temperature		
• if installed on horizontal mounting rail / during operation	°C	0 ... 60
• if installed on vertical mounting rail / during operation	°C	0 ... 50
• during transport	°C	-40 ... +70
• during storage	°C	-40 ... +70
Relative humidity / at 25 °C / during operating / maximum	%	95
Installation altitude / at a height over sea level / maximum	m	2,000

Safety:

Acceptability for application / safety-related function		No
Explosion protection labeling / for intrinsic safety of related operating resources		
• EEX ia		No
• EEX ib		No
Explosion protection category for gas		none
Explosion protection category for dust		none

Certificates/approvals:

General Product Approval	Declaration of Conformity
--------------------------	---------------------------



Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator:


<http://www.siemens.com/cax>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RK7137-6SA00-0BC1/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RK7137-6SA00-0BC1



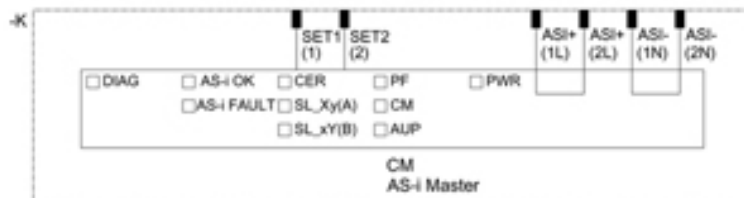

last change:

May 28, 2013